


NUOVA BRAVO 1.4 16v HOSE TO L/H OR R/H REAR BRAKES (ONE) - R+R 3340B30

[back to REAR BRAKE CALIPER \(ONE\), LEFT OR RIGHT - R.R](#)

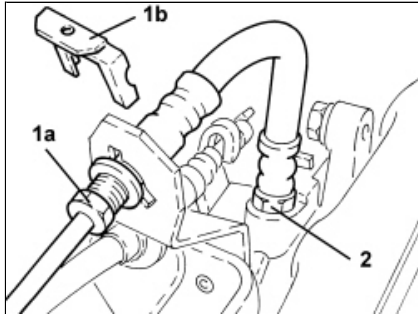

Removing ([Refitting](#))

- Position the vehicle on a lift.
- Unscrew the brake/clutch fluid reservoir plug and fit the tool.

Tool	Description	Function	Validity
2000001400	Plug	Brake/ clutch system vacuum	

Op. 4450B06 LEFT REAR WHEEL - R.R

1. Undo nut (1a) and remove spring (1b).
2. Undo the connector and disconnect the hose from the brake calliper.

Refitting ([Removing](#))

- Fit the hose in the housing, connect to the brake callipers and tighten the connector to the recommended torque.

Component	Fastening	dia	Value (daNm)	Validity
Flexible pipe to front brakes - brake caliper side	Connector	M10	1.4 ÷ 1.8	

- Connect the hose, secure with the clips and tighten the connector to the specified torque.

Component	Fastening	dia	Value (daNm)	Validity
Brake pipe connectors	Connector	M10	1.4 ÷ 1.8	

Op. 0010T64 BRAKE AND/OR CLUTCH FLUID CHECK LEVEL AND TOP UP AS NECESSARY

Op. 0010T65 HYDRAULIC BRAKE SYSTEM - BLEED AIR

Op. 4450B06 LEFT REAR WHEEL - R.R

- Remove the vehicle from the lift.