



Checking valve for correct seating

NOTE *If the seating is not well centered, recut the valve seat until this will happen.
If this is not possible, replace the valve seat.*

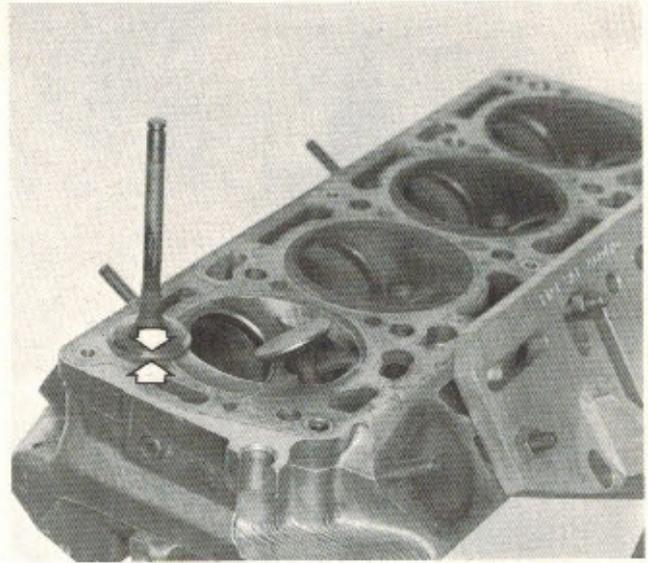

Checking stem height after facing

NOTE *If it is too high, shorten the valve stem by facing.*

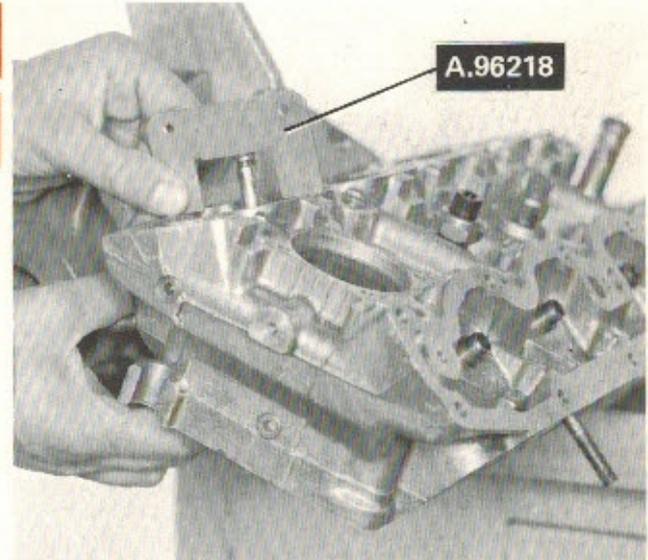

SPRINGS

Valve spring load test

NOTE *Before fitting, the internal and external valve springs must be checked to ensure that the minimum loads are within the prescribed values.*

